



a Standex company

ITEM: \_\_\_\_\_ PROJECT NAME: \_\_\_\_\_ DATE: \_\_\_\_\_

## HYBRID MERCHANDISER

**SERVICE NON-REFRIGERATED  
OVER SELF-SERVE REFRIGERATED**

- MODEL  CD3628/RSS3SC  
 CD4828/RSS4SC  
 (2)CD3628/RSS6SC

**SELF-SERVE NON-REFRIGERATED  
OVER SELF-SERVE REFRIGERATED**

- MODEL  CD3628SS/RSS3SC  
 CD4828SS/RSS4SC  
 (2)CD3628SS/RSS6SC



*Display more product and serve more customers with presentation and value in mind.  
Cases are available in lengths of 36", 48", and 72".*

### STANDARD FEATURES

#### Refrigerated Self-Serve Bottom Display

- Black laminated exterior. Other finishes available.
- Black trim. Silver optional.
- Black interior, glass ends.
- Horizontal top and front light.
- Two tiers black metal shelves.
- Cord and plug. (Not available on six foot unit.)

#### Service or Self-Serve Non-Refrigerated Top Display

- Two tiers black wire shelves.
- Top light and shelf lights.
- Sliding rear doors.
- Black trim.
- Self-Serve has three hinged lift-up front doors.

# NON-REFRIGERATED OVER SELF-SERVE REFRIGERATED MERCHANDISER

## OPTIONAL ACCESSORIES:


### For Top Display

- Glass Shelves
- Reflective Ends
- Reflective Rear Doors


### For Self-Serve Refrigerated Base

- Energy Saving Night Curtain
- Silver Trim
- Special Base Finish
- Mirrored Interior Ends
- Security Night Cover
- Stainless Steel Steps in Lieu of Metal Shelves
- Reflective End Glass

## SERVICE NON-REFRIGERATED OVER SELF-SERVE REFRIGERATED

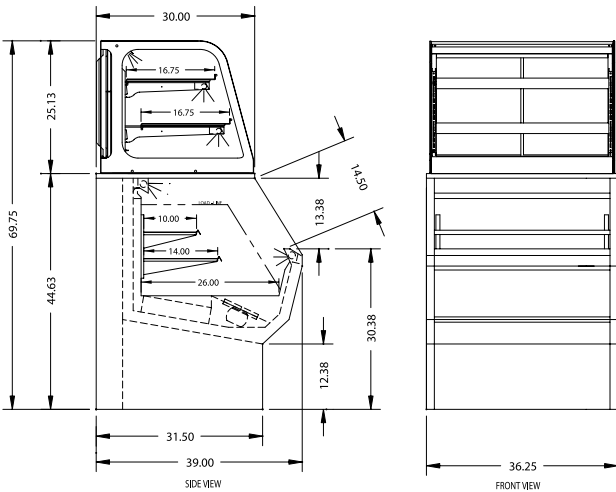

## SELF-SERVE NON-REFRIGERATED OVER SELF-SERVE REFRIGERATED

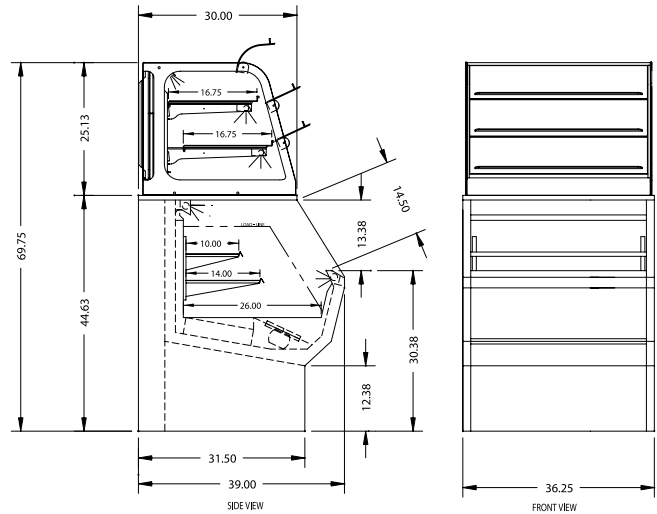

## SPECIFICATIONS:

| Model                                       | Dimensions<br>L W H     | Approx. Shipping<br>Weight (lbs) | Bottom Display<br>120/60/1 | Top Display<br>120/60/1 |
|---|-------------------------|----------------------------------|----------------------------|-------------------------|
| <input type="checkbox"/> CD3628/RSS3SC      | 36 1/4" x 39" x 69 3/4" | 847                              | 1/3 HP • 14.8 AMPS         | 1.5 AMPS                |
| <input type="checkbox"/> CD4828/RSS4SC      | 48" x 39" x 69 3/4"     | 1,010                            | 1/2 HP • 16.0 AMPS         | 1.5 AMPS                |
| <input type="checkbox"/> (2)CD3628/RSS6SC   | 72" x 39" x 69 3/4"     | 1,500                            | 3/4 HP • 16.0 + 10 AMPS    | (2) 1.5 AMPS            |
| <input type="checkbox"/> CD3628SS/RSS3SC    | 36 1/4" x 39" x 69 3/4" | 780                              | 1/3 HP • 14.8 AMPS         | 1.5 AMPS                |
| <input type="checkbox"/> CD4828SS/RSS4SC    | 48" x 39" x 69 3/4"     | 900                              | 1/2 HP • 16.0 AMPS         | 1.5 AMPS                |
| <input type="checkbox"/> (2)CD3628SS/RSS6SC | 72" x 39" x 69 3/4"     | 1,300                            | 3/4 HP • 16.0 + 10 AMPS    | (2) 1.5 AMPS            |

- Refrigerated cases are designed to operate in an environment of 75°F ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.
- On the six foot display a separate 120/60/1 15 AMP circuit is required for the condensate evaporator.



*The Signature of Quality*

**FEDERAL INDUSTRIES**  
A Standex Company

215 FEDERAL AVENUE, BELLEVILLE, WISCONSIN 53508-9201

PHONE: 800-356-4206

EMAIL: geninfo@federalind.com

FAX: 608-424-3234

WEBSITE: www.federalind.com

